

## Fan type T-300K and T-300D Technical data

Motor: IP 55

### Fan T-300K

Supplied with the following motors:

kW	amp.	Weight of motor kg
22,0	39,0	165
30,0	52,3	246
37,0	64,5	256
45,0	78,0	328

### Fan T-300D

Supplied with the following motors:

kW	amp.	Weight of motor kg
30,0	52,3	246
37,0	64,5	266
45,0	78,0	336

Max. min<sup>-1</sup>:

Standard impeller: 3.000 min.<sup>-1</sup>

Durable impeller: 2,400 min.<sup>-1</sup>

### Operating range T-impeller:

Air volume: 2.000 - 11.000 m<sup>3</sup>/h

Pressure: 3.500 - 10.800 Pa

### Power supply:

3 x 400 V - 50 Hz.




### Construction:

Standard housing with motor stand.

Reinforced housing with motor stand.

### T-impeller:

Standard, Durable and Paper

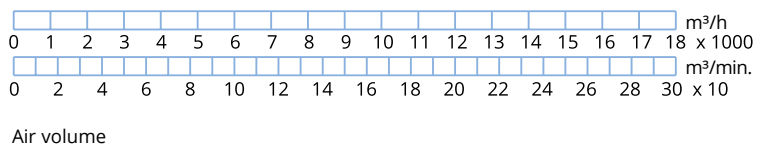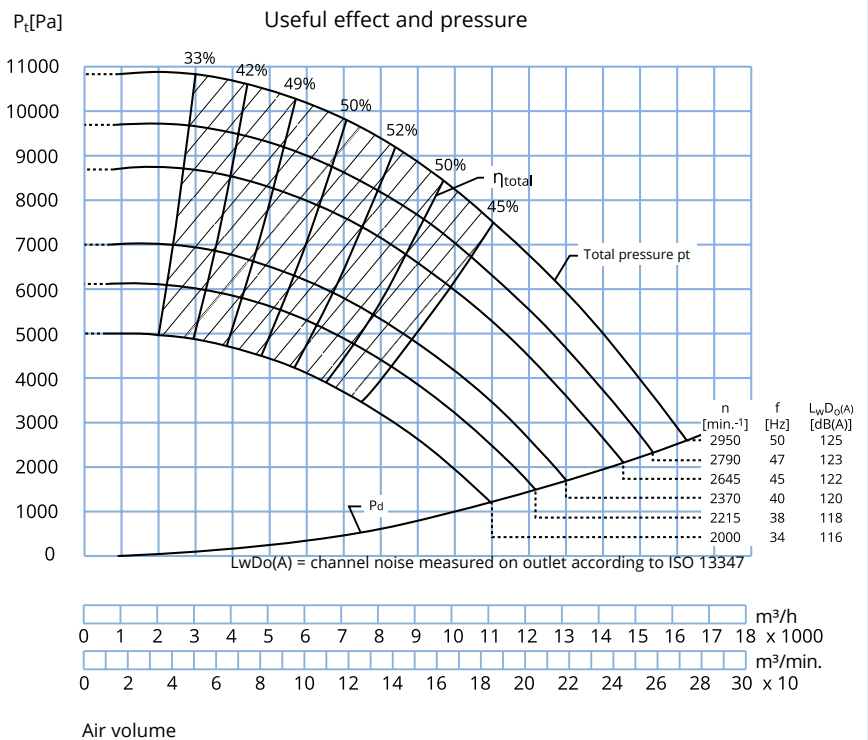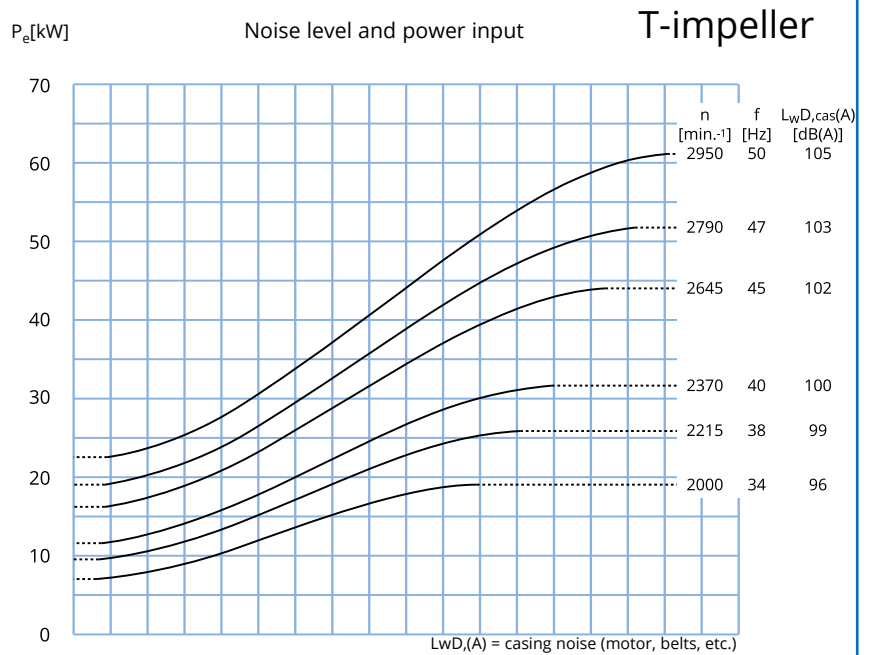

# Fan type T-300K and T-300D

## Technical data

Motor: IP 55

### Fan T-300K

Supplied with the following motors:

kW	amp.	Weight of motor kg
22,0	39,0	165
30,0	52,3	246
37,0	64,5	256
45,0	78,0	328

### Fan T-300D

Supplied with the following motors:

kW	amp.	Weight of motor kg
30,0	52,3	246
37,0	64,5	266
45,0	78,0	336

Max. min<sup>-1</sup>:

Impeller: 3.000 min.<sup>-1</sup>

### Operating range P-impeller:

Air volume: 2.000 - 14.000 m<sup>3</sup>/h

Pressure: 2.500 - 10.800 Pa

### Power supply:

3 x 400 V - 50 Hz.

### Construction:

Standard housing with motor stand.

### P-impeller:

Standard.

