

# DUST COLLECTOR SDCC-L

**Dust collector type SDCC-L is a compressed air cleaned cartridge filter for continuous filtration of fine dust.**

## Description

Dust collector type SDCC-L is a compressed air cleaned cartridge filter for continuous filtration of fine dust. The collector is not suitable for filtration of voluminous dust such as from wood, paper and textile. The circular gas inlet and outlet, can be swiveled to an optional position as the filter consists of several reciprocally adjustable parts. The separator is designed as an under pressure filter and can be located indoors or outdoors, if it is placed with protection from the weather.

## Filter cleaning

The dust laden air is filtered through filter cartridges, where the dust sticks to the outside. The filter cartridges are cleaned with short bursts of compressed air. Cleaning of the cartridges is done through a separate steering central or by cleaning automatics e.g. MT (extra equipment). For the most effective cleaning, the cartridges should also be cleaned when the fan is turned off.

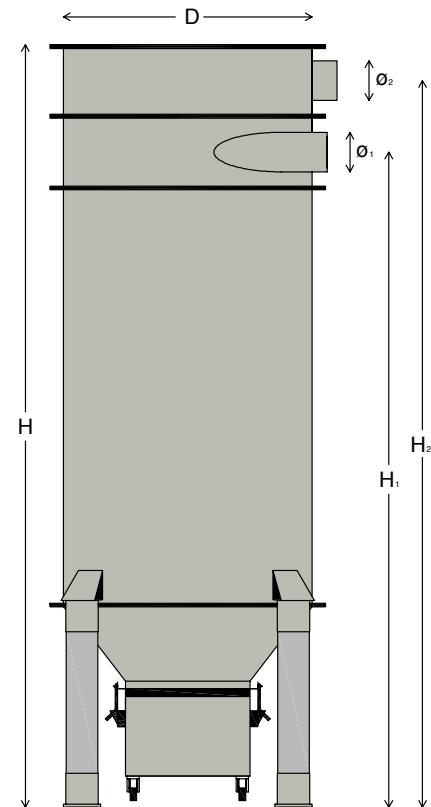
## Dust container

The dust is collected in a dust container, equipped with a plastic bag. The amount of dust should regularly be controlled and the plastic bag replaced if needed. The container can also, as an optional device, be equipped with a level sensor with an alarm protection against overfilling.



**Dimensions**

Model	SDCC-7,5-L	SDCC-11-L	SDCC-25-L	SDCC-40-L
D (mm)	450	630	800	1100
H (mm)	1700	2400	2400	2700
H1 (mm)	1225	1980	1980	2150
H2 (mm)	1470	2260	2260	2550
Ø1 inl. (mm)	102	200	200	250
Ø2 utl. (mm)	102	200	200	250
A (mm)	485	665	715	730
B (mm)	485	470	715	730
C (mm)	120	120	120	120

**Technical data**

Model	SDCC-7,5-L	SDCC-11-L	SDCC-25-L	SDCC-40-L
Filter ( $m^2$ )	7,5	10,5	25	40
No. of cartridges	1	1	1	4
No. of valves	1	1	1	4
Container (L)	90	90	90	90
Weight (kg)	65	110	180	220

**Compressed air requirement:**

max 2 l/s, 4,5 bar, free of oil and water. Maximum gas temperature: +60 ° C.

The following service spaces need to be considered: minimum 800 mm in front of the filter and 500 mm above the filter.

