


Sanding tables, galvanised

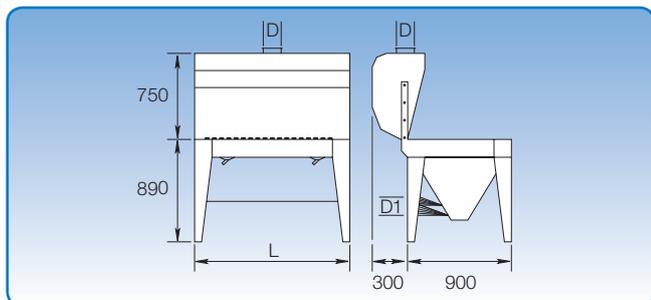

Sanding tables are designed to give the operator optimum working conditions. This applies to ergonomic and environmental conditions.

A special "Coanda" effect is used, which keeps the operator's respiratory system free of airborne dust.

Air volume can be adjusted in models with a louvre gate in the top.

Sanding tables are made of galvanised sheet metal.

2 different sizes are available as standard.

Dimension 900 mm.

Dimension 1350 mm.

Leg height is not adjustable. Fixed legs can be ordered for a specified table height.

Dimension 900:


Supplied as standard with no louvre gate but with upper screen.

At an additional price:

Special model with louvre gate and upper screen.

Special model with no louvre gate and upper screen.

Special model with louvre gate and no upper screen.

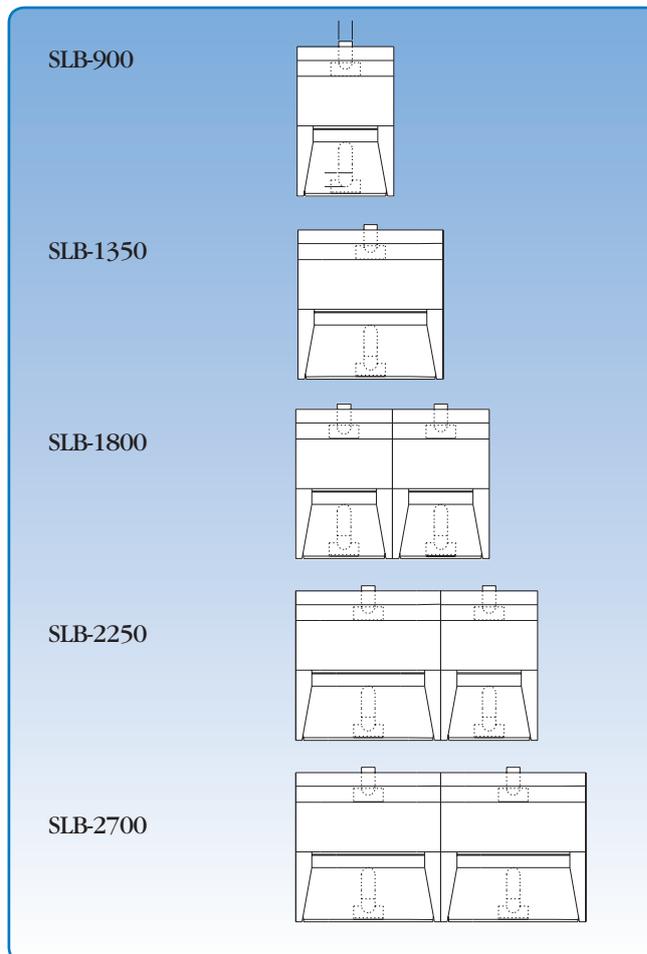

Dimensional specifications are given in the table below.

Dimension 1350:

Supplied as standard with no louvre gate but with upper screen.

At an additional price:

Special model with louvre gate and upper screen.

Special model with no louvre gate and upper screen.

Special model with louvre gate and no upper screen.

Type	Dimensions			Primary suction m ³ / h	Suction below table m ³ / h	Weight kg
	L mm	D mm	D1 mm			
SLB-900	900	125	125	1200	1200	79
SLB-1350	1350	160	150	1800	1200	96
SLB-1800	1800	2 x 125	2 x 125	2400	2400	160
SLB-2250	2250	160 and 125	150 and 125	3000	2400	176
SLB-2700	2700	2 x 160	2 x 150	3600	2400	195